SEBK

SUPER-ELASTIK RÄDER

Reifen: Die Lauffläche ist außerordentlich zäh und verschleißfest, sie sichert dem Reifen eine lange Lebensdauer. Die hochelastische Zwischenschicht gewährleistet sowohl gute Stoß- und Schwingungsdämpfung als auch geringen Rollwiderstand. Im Reifenfuß aus zähharter, patentierter Mischung sind die Stahldrahtkerne eingebettet, die dem Reifen einen festen Felgensitz geben.
Felge: Zweiteilige, verstärkte Stahlblechfelge, verzinkt, verschraubt.

SUPER-ELASTIC WHEELS

Tire: *The tread is exceptionally tough and wear-resistant which gives the tire a long life. The highly elastic intermediate layer ensures good impact and vibration damping as well as a low rolling resistance. The steel wire mesh is embedded in the tire base of a tough, patented mixture, which gives the tire a firm rim seating.*
Rim: *Two-part, reinforced steel plate, galvanized, screwed.*

-25° C - +80 °C , Härte / *Hardness*: 70° +/-5° Shore A

	mm	mm	Reifenmaß *Tire Dimension*	Felgenmaß *Rim Dimension*	mm	mm	kg max. 6 km/h	kg max. 25 km/h	Lagerart *bearing*
SEBK250/085/75/20	250	85	3.00-4	2.50C-4	20	75	260	195	Kugellager *ball bearing*
SEBK250/085/75/25	250	85	3.00-4	2.50C-4	25	75	260	195	Kugellager *ball bearing*
SEBK300/090/75/20	300	90	4.00-4	2.50C-4	20	75	535	412	Kugellager *ball bearing*
SEBK300/090/75/25	300	90	4.00-4	2.50C-4	25	75	535	412	Kugellager *ball bearing*
SEBK400/100/90/20	400	100	4.00-8	3.00D-8	20	90	950	730	Kugellager *ball bearing*
SEBK400/100/90/25	400	100	4.00-8	3.00D-8	25	90	950	730	Kugellager *ball bearing*
SEBK400/100/90/30	400	100	4.00-8	3.00D-8	30	90	950	730	Kugellager *ball bearing*
SEBK445/118/90/25	445	118	5.00-8	3.00D-8	25	90	1415	1090	Kugellager *ball bearing*
SEBK445/118/90/30	445	118	5.99-8	3.00D-8	30	90	1415	1090	Kugellager *ball bearing*

L/SEBK, B/SEBK

SUPER-ELASTIK ROLLEN

Gehäuse: Stabile gepresste Stahlblechgehäuse galvanisch verzinkt.
Drehkranz mit zweifachem Kugelkranz, Radachse verschraubt. Mit Anschraubplatte.
Rad: Super-Elastikrad mit zweiteiliger, verstärkter Stahlblechfelge, verzinkt, verschraubt.

SUPER-ELASTIC CASTORS

Housing: *Solid housing, made from galvanized steel, pressed. Pivot bearing with double ball ring, screwed axle. With mounting plate.*
Wheel: *Super-elastic wheel with two-part sheet steel rim, reinforced, galvanized, screwed.*



-25° C - +80 °C , Härte / *Hardness*: 70° +/-5° Shore A

			mm	mm	mm	mm	mm	mm	mm	kg 20°C	Lagerart *bearing*
L/SEBK250	L/SEBK250/F	-/-	250	85	290	70	175X175	140X140	15	260	Kugellager *ball bearing*
-/-	-/-	B/SEBK250	250	85	290	-/-	230X130	190X75	15	260	Kugellager *ball bearing*

LSV/SEBK, BSV/SEBK

SUPER-ELASTIK ROLLEN

Gehäuse: Besonders stabile, gepresste und geschweißte Stahlblechgehäuse, lackiert. Drehkranz ohne Mittelbolzen, mit zweifachem gehärtetem, geschlossenem Kugelkranz, dadurch staub- und spritzwasserdicht und besonders unempfindlich gegen Stöße und Schläge, Radachse verschraubt. Mit Anschraubplatte.
Rad: Super-Elastikrad mit zweiteiliger, verstärkter Stahlblechfelge, verzinkt, verschraubt.

SUPER-ELASTIC CASTORS

Housing: *Extra solid housing, made from steel, pressed and welded, painted. Screwed swivel ring, without central kingpin, with double tempered, closed ball rim, dust- and splash-proof and extremely resistant to shock and vibration, screwed axle. With mounting plate.*
Wheel: *Super-elastic wheel with two part, reinforced sheet steel rim, galvanized, screwed.*

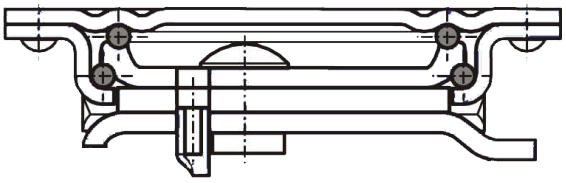

-25° C - +80 °C , Härte / *Hardness*: 70° +/-5° Shore A

		mm	mm	mm	mm	mm	mm	mm	kg 20°C	Lagerart *bearing*
LSV/SEBK300	BSV/SEBK300	300	90	355	75	135x110	105x75-80	11	535	Kugellager *ball bearing*
LSV/SEBK400	BSV/SEBK400	400	100	470	100	135x110	105x75-80	11	950	Kugellager *ball bearing*

LSO/SEBK, BSO/SEBK

SUPER-ELASTIK ROLLEN

Gehäuse: Sehr robuste Stahlschweißkonstruktion mit Axial-Rillenkugellager und Kegelrollenlager im Drehkranz, lackiert, mit Schmiernippel, staub- und spritzwassergeschützt. Mit Anschraubplatte.
Rad: Super-Elastikrad mit zweiteiger, verstärkter Stahlblechfelge, verzinkt, verschraubt.

SUPER-ELASTIC CASTORS

Housing: *Solid welded steel construction, with deep groove ball thrust bearing and taper roller bearing in the swivel ring, painted, with lubricating nippel, dust and splash water protected.With mounting plate.*
Wheel: *Super-elastic wheel with two-part, reinforced sheet steel rim, galvanized, screwed.*

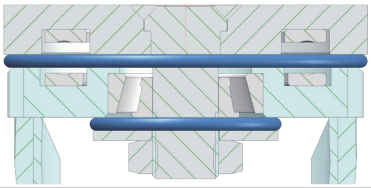

-25° C - +80 °C , Härte / *Hardness*: 70° +/-5° Shore A

			mm	mm	mm	mm	mm	mm	mm	kg 20°C	Lagerart *bearing*
LSO/SEBK250S	LSO/SEBK250S/F	BSO/SEBK250S	250	85	305	75	175X140	140X105	15	260	Kugellager *ball bearing*
LSO/SEBK300SL	LSO/SEBK300SL/RF	BSO/SEBK300SL	300	90	370	85	200X160	160x120	15	535	Kugellager *ball bearing*
LSO/SEBK400SL	LSO/SEBK400SL/RF	BSO/SEBK400SL	400	100	470	100	200X160	160x120	15	950	Kugellager *ball bearing*
LSO/SEBK445SL	LSO/SEBK445SL/RF	BSO/SEBK445SL	445	118	512	110	200X160	160x120	15	1415	Kugellager *ball bearing*

LDSO/SEBK, BDSO/SEBK

SUPER-ELASTIK DOPPELROLLEN

Gehäuse: Sehr robuste Stahlschweißkonstruktion mit Axial-Rillenkugellager und Kegelrollenlager im Drehkranz, lackiert, mit Schmiernippel, staub- und spritzwassergeschützt. Mit Anschraubplatte.
Rad: Super-Elastikrad mit zweiteiliger, verstärkter Stahlblechfelge, verzinkt, verschraubt.

SUPER-ELASTIC CASTORS

Housing: *Solid welded steel construction, with deep groove ball thrust bearing and taper roller bearing in the swivel ring, painted, with lubricating nippel, dust and splash water protected. With mounting plate.*
Wheel: *Super-elastic wheel with two-part, reinforced sheet steel rim, galvanized, screwed.*

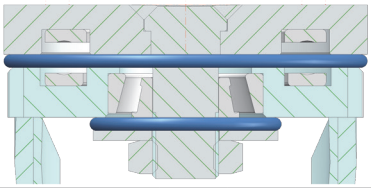

-25° C - +80 °C , Härte / *Hardness*: 70° +/-5° Shore A

			mm	mm	mm	mm	mm	mm	mm	kg 20°C	Lagerart *bearing*
LDSO/SEBK300SL	LDSO/SEBK300SL/RF	-/-	300	2x90	370	85	200X160	160x120	15	1070	Kugellager *ball bearing*
-/-	-/-	BDSO/SEBK300SL	300	2x90	370	-/-	300X160	160x120	15	1070	Kugellager *ball bearing*
LDSO/SEBK400SL	LDSO/SEBK400SL/RF	-/-	400	2x100	470	100	200X160	160x120	15	1900	Kugellager *ball bearing*
-/-	-/-	BDSO/SEBK400SL	400	2x100	470	-/-	300X160	160x120	15	1900	Kugellager *ball bearing*
LDSO/SEBK445XS	LDSO/SEBK445XS/RF	-/-	445	2x118	527	125	260X200	210X160	21	2830	Kugellager *ball bearing*
-/-	-/-	BDSO/SEBK445XS	445	2x118	527		360X200	210X160	21	2830	Kugellager *ball bearing*